


HFPM-8022-ER20-HY

Technische Daten | Technical data

Typenbezeichnung Type designation	mechatron HFPM-8022-ER20-HY
Leistung Power	S1 (100%) 2,2 kW
Nenn Drehzahl / Frequenz rated Speed / Frequency	24.000 U/min / 800Hz
Erhältliche max. Drehzahl / Frequenz Available max. Speed / Frequency	24.000 U/min / 800Hz 30.000 U/min / 1000Hz
Spannung Voltage	230 V
Strom Current	S1 (100%) 7,0 A
Polzahl Number of poles	4
Pneumatikanschlüsse Pneumatic connections	Sperrluft Sealing air

Kühlart Cooling method	Flüssigkeitskühlung Liquid cooling
Kühlmitteltemperatur Coolant temperature	max. 35 °C
Thermoschutz Thermal protection	Bimetallschalter (Öffner) Bimetal switch (NC contact)
Schutzart IP Code	IP54
Rundlauf (Kegel) Runout (taper)	< 2,0 µm
Werkzeugwechsel Tool change	Manuell, Spannmutter (M24x1) Manually, clamping nut
Werkzeugschnittstelle Tool interface	ER20
Spannbereich Clamping Range	1 - 13 mm
Gewicht Weight	6,9 kg

Motorkennlinie | Motor characteristic

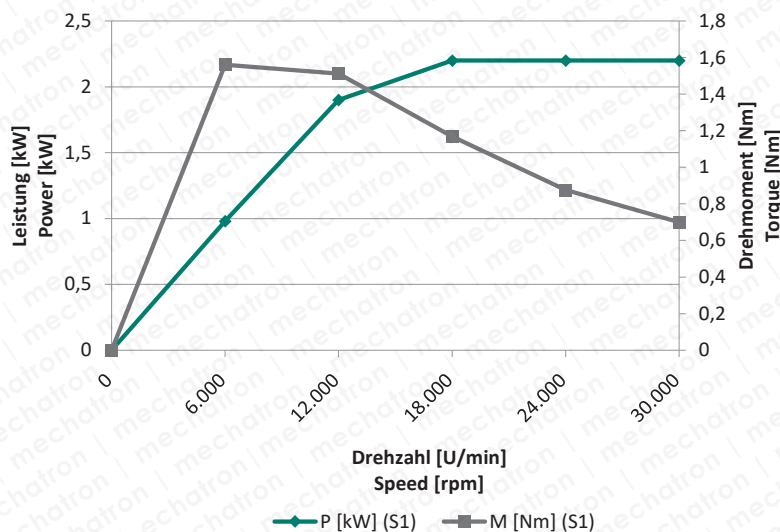

Abmessungen | Dimensions

